



# LMK 358H

## Detachable Stainless Steel Probe with HART®-Communication

Ceramic Sensor

accuracy according to IEC 60770:  
0.1 % FSO

### Nominal pressure

from 0 ... 60 cmH<sub>2</sub>O up to 0 ... 100 mH<sub>2</sub>O

### Output signals

2-wire: 4 ... 20 mA  
others on request

### Special characteristics

- ▶ diameter 39.5 mm
- ▶ diaphragm ceramics Al<sub>2</sub>O<sub>3</sub> 99.9 %
- ▶ HART® communication  
(setting of offset, span and damping)
- ▶ permissible temperatures up to 85 °C
- ▶ high overpressure resistance
- ▶ high long-term stability

### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe for gas and dust
- ▶ accessories e.g. mounting flange with cable gland and terminal clamp

The detachable stainless steel probe LMK 358H has been designed for level measurement in waste water, waste and higher viscosity media. Basic element is a capacitive ceramic sensor.

In order to facilitate stock-keeping and maintenance the sensor head is plugged to the cable assembly with a connector and can be changed easily.

### Preferred areas of use are



#### Water

ground water level measurement  
rain spillway basin



#### Sewage

waste water treatment  
water recycling



#### Fuel and oil

level monitoring in open tanks  
with low filling heights  
fuel storage  
tank farms  
biogas plants



# LMK 358H

Detachable Stainless Steel Probe

Technical Data

Input pressure range <sup>1</sup>								
Nominal pressure gauge	[bar]	0.06	0.16	0.4	1	2	5	10
Level	[mH <sub>2</sub> O]	0.6	1.6	4	10	20	50	100
Overpressure	[bar]	2	4	6	8	15	25	35
Max. ambient pressure (housing): 40 bar								
<sup>1</sup> on customer request we adjust the devices by software on the required pressure ranges, within the turn-down-possibility (starting at 0.02 bar)								
Output signal / Supply								
Standard	2-wire: 4 ... 20 mA / V <sub>S</sub> = 12 ... 36 V <sub>DC</sub> with HART® communication						V <sub>S rated</sub> = 24 V <sub>DC</sub>	
Option IS-version	2-wire: 4 ... 20 mA / V <sub>S</sub> = 12 ... 28 V <sub>DC</sub> with HART® communication						V <sub>S rated</sub> = 24 V <sub>DC</sub>	
Performance								
Accuracy <sup>2</sup>	p <sub>N</sub> ≥ 160 mbar	TD ≤ 1:5 ≤ ± 0.2 % FSO TD > 1:5 ≤ ± [0.2 + 0.03 x TD] % FSO					TD <sub>max</sub> = 1:10	
	p <sub>N</sub> < 160 mbar	≤ ± [0.2 + 0.1 x TD] % FSO					TD <sub>max</sub> = 1:3	
	p <sub>N</sub> ≥ 1 bar	TD ≤ 1:5 ≤ ± 0.1 % FSO TD > 1:5 ≤ ± [0.1 + 0.02 x TD] % FSO					TD <sub>max</sub> = 1:10	
Permissible load	R <sub>max</sub> = [(V <sub>S</sub> – V <sub>S min</sub> ) / 0.02 A] Ω load at HART®-communication: R <sub>min</sub> = 250 Ω							
Long term stability	≤ ± (0.1 x turn-down) % FSO / year at reference conditions							
Influence effects	supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ							
Turn-on time	850 msec							
Mean response time	140 msec – without consideration of electronic damping						measuring rate 7/sec	
Max. response time	380 msec							
Adjustability	configuration of following parameters possible (interface / software necessary <sup>3</sup> ) - electronic damping 0 ... 100 sec - offset: 0 ... 80 % FSO - turn-down of span: max. 1:10							
<sup>2</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)								
<sup>3</sup> software, interface, and cable have to be ordered separately (software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or higher, and XP)								
Thermal effects (offset and span) / Permissible temperatures								
Tolerance band	≤ ± 1 % FSO							
In compensated range	-20 ... 80 °C							
Permissible temperatures	medium / electronic / environment / storage: -25 ... 85 °C							
Electrical protection <sup>4</sup>								
Short-circuit protection	permanent							
Reverse polarity protection	no damage, but also no function							
Lightning protection	integrated							
Electromagnetic compatibility	emission and immunity according to EN 61326							
<sup>4</sup> additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request								
Mechanical stability								
Vibration	4 g (according to: DIN EN 60068-2-6)							
Electrical connection								
Cable with sheath material <sup>5</sup>	PVC (-5 ... 70 °C) grey Ø 7.4 mm PUR (-25 ... 70 °C) black Ø 7.4 mm FEP <sup>6</sup> (-25 ... 70 °C) black Ø 7.4 mm TPE-U (-25 ... 85 °C) blue Ø 7.4 mm							
Bending radius	static installation: 10-fold cable diameter dynamic application: 20-fold cable diameter							
<sup>5</sup> shielded cable with integrated ventilation tube for atmospheric pressure reference								
<sup>6</sup> do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected								
Materials (media wetted)								
Housing	stainless steel 1.4404 (316L)							
Seals	FKM, EPDM, others on request							
Diaphragm	ceramics Al <sub>2</sub> O <sub>3</sub> 99.9 %							
Protection cap	POM-C							
Cable sheath	PVC, PUR, FEP, TPE-U							
Explosion protection								
Approval DX15A-LMK 358H	IBExU 10 ATEX 1186 X zone 0: II 1G Ex ia IIB T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da							
Safety technical maximum values	U <sub>i</sub> = 28 V, I <sub>i</sub> = 93 mA, P <sub>i</sub> = 660 mW, C <sub>i</sub> = 13,2 nF, L <sub>i</sub> = 0 µH, the supply connections have an inner capacity of max. 27 nF opposite the enclosure							
Permissible media temperature	in zone 0: -20 ... 60 °C with p <sub>atm</sub> 0.8 bar up to 1.1 bar zone 1 or higher: -25 ... 70 °C							
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 µH/m							

# LMK 358H

Detachable Stainless Steel Probe


Technical Data

## Miscellaneous


Current consumption	max. 21 mA
Weight	approx. 650 g (without cable)
Ingress protection	IP 68
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

## Wiring diagram

2-wire-system (current) HART®

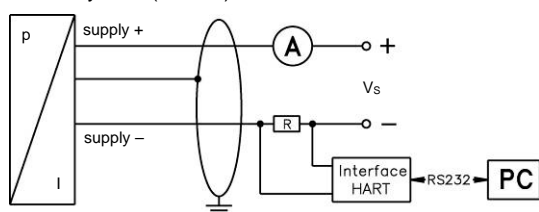

connector



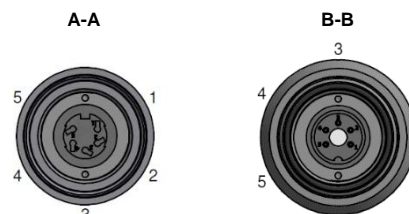


## Pin configuration

Electrical connection	Binder series 723 <sup>7</sup> (5-pin)	cable colours (IEC 60757)
Supply +	3	WH (white)
Supply -	1	BN (brown)
Shield	5	GNYE (green-yellow)

<sup>7</sup> if detached

## Dimensions (mm / in)

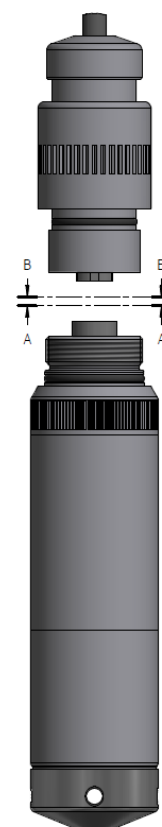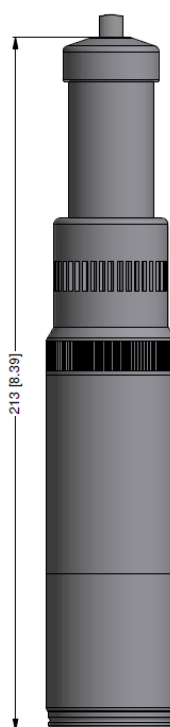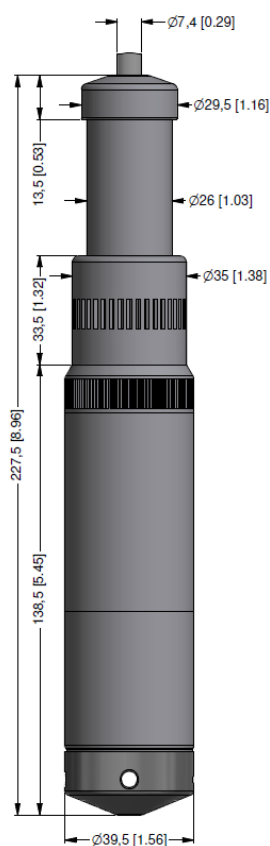


protection cap  
removable

sensor head  
and cable detached

HART® is a registered trade mark of HART Communication Foundation; Windows® is a registered trade mark of Microsoft Corporation

### Mounting flange with cable gland

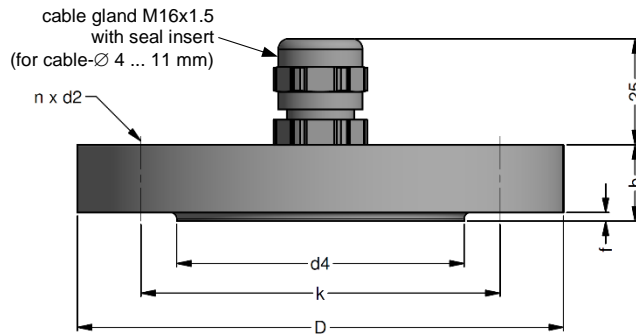

dimensions in mm			
size	DN25 / PN40	DN50 / PN40	DN80 / PN16
b	18	20	20
D	115	165	200
d2	14	18	18
d4	68	102	138
f	2	3	3
k	85	125	160
n	4	4	8

### Technical data

Suitable for	all probes		
Flange material	stainless steel 1.4404 (316L)		
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic		
Seal insert	material: TPE (ingress protection IP 68)		
Hole pattern	according to DIN 2507		

Ordering type	Ordering code	Weight
DN25 / PN40 with cable gland brass, nickel plated	ZMF2540	1.4 kg
DN50 / PN40 with cable gland brass, nickel plated	ZMF5040	3.2 kg
DN80 / PN16 with cable gland brass, nickel plated	ZMF8016	4.8 kg

### Terminal clamp



### Technical data

Suitable for	all probes with cable Ø 5.5 ... 10.5 mm		
Material of housing	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)		
Material of clamping jaws and positioning clips	PA (fibre-glass reinforced)		
Dimensions (mm)	174 x 45 x 32		
Hook diameter	20 mm		

Ordering type	Ordering code	Weight
Terminal clamp, steel, zinc plated	Z100528	approx. 160 g
Terminal clamp, stainless steel 1.4301 (304)	Z100527	

### Display program

- CIT 200** Process display with LED display
- CIT 250** Process display with LED display and contacts
- CIT 300** Process display with LED display, contacts and analogue output
- CIT 350** Process display with LED display, bargraph, contacts and analogue output
- CIT 400** Process display with LED display, contacts, analogue output and Ex-approval
- CIT 600** Multichannel process display with graphics-capable LC display
- CIT 650** Multichannel process display with graphics-capable LC display and datalogger
- CIT 700 / CIT 750** Multichannel process display with graphics-capable TFT monitor, touchscreen and contacts
- PA 440** Field display with 4-digit LC display

For further information please contact our sales department or visit our homepage:  
<http://www.bdsensors.de>



Ordering code LMK 358H

LMK 358H

			-					-		-		-		-		-				-			
--	--	--	---	--	--	--	--	---	--	---	--	---	--	---	--	---	--	--	--	---	--	--	--

Pressure																			
		in bar	4	4	5														
		in mH <sub>2</sub> O	4	4	6														
Input	[mH <sub>2</sub> O]	[bar]																	
	0.6	0.06				0	6	0	0										
	1.6	0.16				1	6	0	0										
	4.0	0.40				4	0	0	0										
	10	1.0				1	0	0	1										
	20	2.0				2	0	0	1										
	50	5.0				5	0	0	1										
	100	10				1	0	0	2										
	customer					9	9	9	9										consult
Housing																			
	stainless steel 1.4404 (316L)								1										
	customer								9										consult
Diaphragm																			
	ceramics Al <sub>2</sub> O <sub>3</sub> 99.9 %								C										
	customer								9										consult
Output																			
	HART®-communication 4 ... 20 mA / 2-wire								H										
	HART®-communication intrinsic safety 4 ... 20 mA / 2-wire								I										
	customer								9										consult
Seal																			
	FKM								1										
	EPDM								3										
	customer								9										consult
Electrical connection																			
	PVC-cable (grey, Ø 7.4 mm) <sup>1</sup>									1									
	PUR-cable (black, Ø 7.4 mm) <sup>1</sup>									2									
	FEP-cable (black, Ø 7.4 mm) <sup>1</sup>									3									
	TPE-U-cable (blue, Ø 7.4 mm) <sup>1</sup>									4									
	customer									9									consult
Accuracy																			
	p <sub>N</sub> ≥ 1 bar	0.1 % FSO								1									
	p <sub>N</sub> < 1 bar	0.2 % FSO								B									
	customer									9									consult
Cable length																			
	in m										9	9	9						
Special version																			
	standard															0	0	0	
	customer															9	9	9	consult

<sup>1</sup> shielded cable with integrated ventilation tube for atmospheric pressure reference

HART<sup>®</sup> is a registered trade mark of HART Communication Foundation