



#### Nominal pressure

from 0 ... 100 mbar up to 0 ... 60 bar

#### Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

others on request

#### Special characteristic

- ▶ perfect thermal behaviour
- ▶ excellent long term stability
- ▶ pressure port  
G 1/2" flush from 100 mbar

#### Optional versions

- ▶ IS-version  
Ex ia = intrinsically safe  
for gases and dusts
- ▶ SIL 2-according to  
IEC 61508 / IEC 61511
- ▶ welded pressure sensor
- ▶ customer specific versions

# DMP 331

## Industrial Pressure Transmitter for Low Pressure

### Stainless Steel Sensor

accuracy according to IEC 61298-2:  
standard: 0.35 % FSO  
option: 0.25 / 0.1 % FSO

The pressure transmitter DMP 331 can be used in all industrial areas when the medium is compatible with stainless steel 1.4404 (316 L) or 1.4435 (316 L). Additional are different elastomer seals as well as a helium tested welded version available.

The modulare concept of the device allows to combine different stainless steel sensors and electronic modules with a variety of electrical and mechanical versions. Thus a diversity of variations is created, meeting almost all requirements in industrial applications.

#### Preferred areas of use are



Plant and machine engineering



Environmental engineering  
(water - sewage - recycling)



Energy industry










# DMP 331








Industrial Pressure Transmitter

Technical Data

Input pressure range															
Nominal pressure gauge [bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6							
Nominal pressure absolute [bar]	-	-	-	-	0.40	0.60	1	1.6							
Overpressure [bar]	5	0.5	1	1	2	5	5	10							
Burst pressure ≥ [bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15							
Nominal pressure gauge / abs. [bar]	2.5	4	6	10	16	25	40	60							
Overpressure [bar]	10	20	40	40	80	80	105	105							
Burst pressure ≥ [bar]	15	25	50	50	120	120	210	210							
Vacuum resistance	$p_N \geq 1 \text{ bar}$ : unlimited vacuum resistance $p_N < 1 \text{ bar}$ : on request														
Output signal / Supply															
Standard	2-wire:	4 ... 20 mA	/	$V_S = 8 \dots 32 \text{ V}_{DC}$	SIL-version: $V_S = 14 \dots 28 \text{ V}_{DC}$										
Option IS-protection	2-wire:	4 ... 20 mA	/	$V_S = 10 \dots 28 \text{ V}_{DC}$	SIL-version: $V_S = 14 \dots 28 \text{ V}_{DC}$										
Options 3-wire	3-wire:	0 ... 20 mA	/	$V_S = 14 \dots 30 \text{ V}_{DC}$											
		0 ... 10 V	/	$V_S = 14 \dots 30 \text{ V}_{DC}$											
Performance															
Accuracy <sup>1</sup>	standard:	nominal pressure < 0.4 bar:			$\leq \pm 0.50 \text{ % FSO}$										
		nominal pressure ≥ 0.4 bar:			$\leq \pm 0.35 \text{ % FSO}$										
	option 1:	nominal pressure ≥ 0.4 bar:			$\leq \pm 0.25 \text{ % FSO}$										
	option 2:	for all nominal pressure ranges:			$\leq \pm 0.10 \text{ % FSO}$										
Permissible load	current 2-wire:	$R_{max} = [(V_S - V_{S \text{ min}}) / 0.02 \text{ A}] \Omega$													
	current 3-wire:	$R_{max} = 240 \Omega$													
	voltage 3-wire:	$R_{min} = 10 \text{ k}\Omega$													
Influence effects	supply:	$0.05 \text{ % FSO} / 10 \text{ V}$													
	load:	$0.05 \text{ % FSO} / \text{k}\Omega$													
Long term stability	$\leq \pm 0.1 \text{ % FSO} / \text{year}$ at reference conditions														
Response time	2-wire:	$\leq 10 \text{ msec}$													
	3-wire:	$\leq 3 \text{ msec}$													
<sup>1</sup> accuracy according to IEC 61298-2 – limit point adjustment (non-linearity, hysteresis, repeatability)															
Thermal effects (offset and span)															
Nominal pressure $p_N$ [bar]	-1 ... 0		$< 0.40$		$\geq 0.40$										
Tolerance band [% FSO]	$\leq \pm 0.75$		$\leq \pm 1$		$\leq \pm 0.75$										
in compensated range [°C]	-20 ... 85		0 ... 70		-20 ... 85										
Permissible temperatures															
Medium	$-40 \dots 125 \text{ }^{\circ}\text{C}$														
Electronics / environment	$-40 \dots 85 \text{ }^{\circ}\text{C}$														
Storage	$-40 \dots 100 \text{ }^{\circ}\text{C}$														
Electrical protection															
Short-circuit protection	permanent														
Reverse polarity protection	no damage, but also no function														
Electromagnetic compatibility	emission and immunity according to EN 61326														
Mechanical stability															
Vibration	20 g RMS / 10 ... 2000 Hz				according to DIN EN 60068-2-6										
Shock	500 g / 1 msec half sine				according to DIN EN 60068-2-27										
Materials															
Pressure port	stainless steel 1.4404 (316 L)														
Housing	stainless steel 1.4404 (316 L)														
Option compact field housing	stainless steel 1.4301 (304) cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)														
Seals	standard: FKM options: EPDM welded version <sup>2</sup> (for $p_N \leq 40 \text{ bar}$ ) others on request														
Diaphragm	stainless steel 1.4435 (316 L)														
Media wetted parts	pressure port, seals, diaphragm														
<sup>2</sup> welded version only with pressure ports according to EN 837 and NPT, $p_N \leq 40 \text{ bar}$															

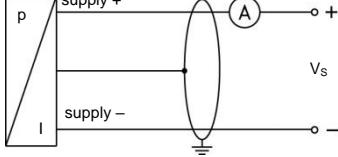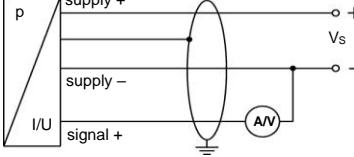Explosion protection (only for 4 ... 20 mA / 2-wire)								
Approvals DX19-DMP 331	IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da							
Safety technical maximum values	$U_i = 28 \text{ V}$ , $I_i = 93 \text{ mA}$ , $P_i = 660 \text{ mW}$ , $C_i \approx 0 \text{ nF}$ , $L_i \approx 0 \mu\text{H}$ , the supply connections have an inner capacity of max. 27 nF to the housing							
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with $p_{\text{atm}}$ 0.8 bar up to 1.1 bar in zone 1 or higher: -40/-20 ... 70 °C							
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 $\mu\text{H}/\text{m}$							
Miscellaneous								
Option SIL2 version <sup>3</sup>	according to IEC 61508 / IEC 61511							
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA							
Weight	approx. 200 g							
Installation position	any <sup>4</sup>							
Operational life	100 million load cycles							
CE-conformity	EMC Directive: 2014/30/EU							
ATEX Directive	2014/34/EU							
<sup>3</sup> only for 4 ... 20 mA / 2-wire, not in combination with accuracy 0.1 %								
<sup>4</sup> Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $p_N \leq 1 \text{ bar}$ .								
Wiring diagrams								
2-wire-system (current)	3-wire-system (current / voltage)							
								
Pin configuration								
Electrical connection	ISO 4400  GND	Binder 723 (5-pin)  1 (top), 2 (bottom), 3 (left), 4 (right), 5 (bottom right)	M12x1 / metal (4-pin)  1 (top), 2 (bottom), 3 (left), 4 (right)	Bayonet MIL-C-26482 (10-6)  A (top), B (bottom), C (left), D (right), E (top right), F (bottom right)	2-wire	3-wire		
Supply +	1	3	1	A	A			
Supply -	2	4	2	B	D			
Signal + (for 3-wire)	3	1	3	-	B			
Shield	ground pin 	5	4	pressure port				
Electrical connection	compact field housing  Vs+, Vs-, S+, GND		cable colours (IEC 60757)					
Supply +	Vs+		WH (white)					
Supply -	Vs-		BN (brown)					
Signal + (for 3-wire)	S+		GN (green)					
Shield	GND		GNYE (green-yellow)					

### Electrical connections (dimensions mm / in)

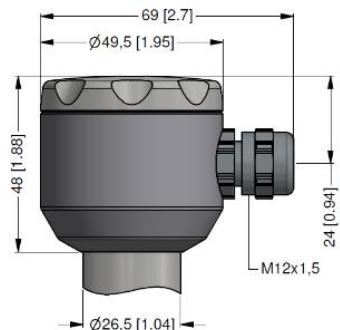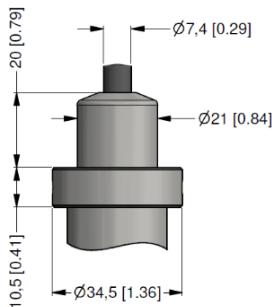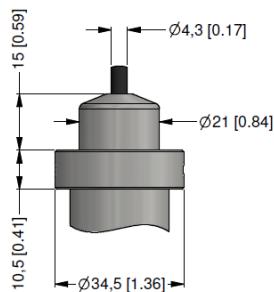


⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

<sup>5</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)


<sup>6</sup> different cable types and lengths available, permissible temperature depends on kind of cable

### Dimensions (mm / in)

#### standard

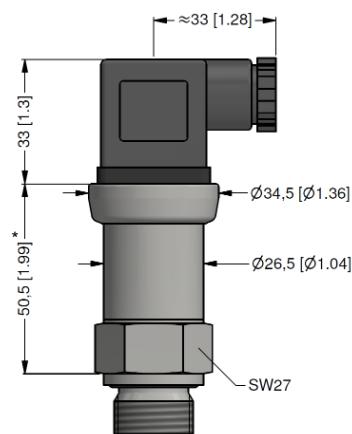


#### SIL- and SIL-IS version

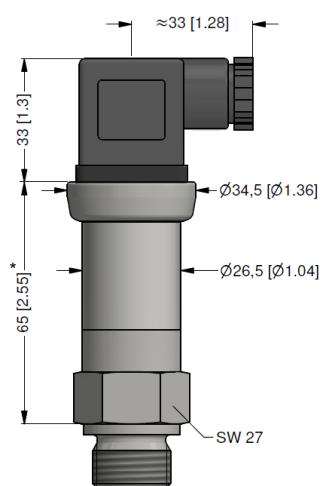


\* with electrical connection Bayonet MIL-C-26482 (10-6) increases the length of devices by 5 mm


### Mechanical connections (dimensions mm / in)

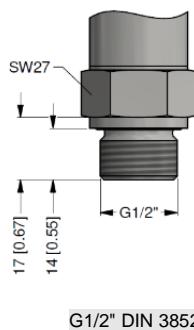


G1/2" DIN 3852

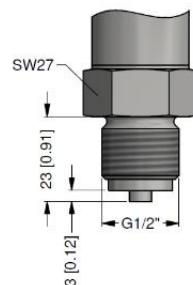


G1/2" EN 837

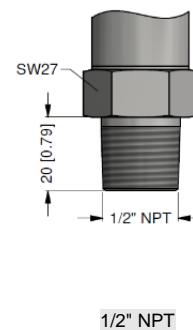


1/2" NPT

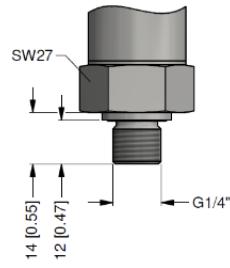


G1/4" DIN 3852

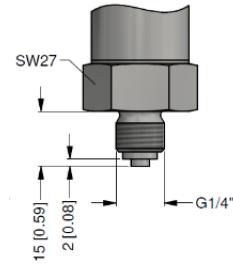


G1/4" EN 837

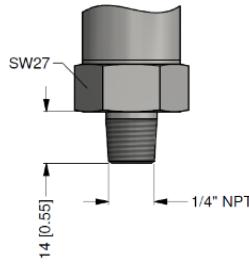

1/4" NPT

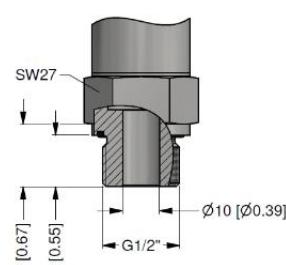

G1/2" open port DIN 3852  
(p<sub>N</sub> ≤ 40 bar)

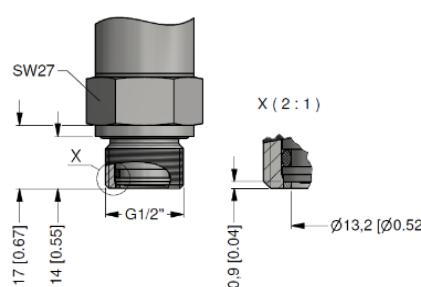

G1/2" flush DIN 3852  
(p<sub>N</sub> ≤ 40 bar)

metric threads and  
other versions on  
request

Ordering code DMP 331

DMP 331

□□□ - □□□ - □ - □ - □□□ - □□ - □□

**Pressure**

gauge  
absolute <sup>1</sup>

1 1 0  
1 1 1

**Input**

[bar]

0.10 <sup>1</sup>  
0.16 <sup>1</sup>  
0.25 <sup>1</sup>  
0.40  
0.60  
1.0  
1.6  
2.5  
4.0  
6.0  
10  
16  
25  
40  
60  
-1 ... 0  
customer

1 0 0 0  
1 6 0 0  
2 5 0 0  
4 0 0 0  
6 0 0 0  
1 0 0 1  
1 6 0 1  
2 5 0 1  
4 0 0 1  
6 0 0 1  
1 0 0 2  
1 6 0 2  
2 5 0 2  
4 0 0 2  
6 0 0 2  
X 1 0 2  
9 9 9 9

consult

**Output**

4 ... 20 mA / 2-wire  
0 ... 20 mA / 3-wire  
0 ... 10 V / 3-wire  
intrinsic safety 4 ... 20 mA / 2-wire  
SIL2 4 ... 20 mA / 2-wire  
SIL2 with intrinsic safety  
4 ... 20 mA / 2-wire  
customer

1  
2  
3  
E  
1S  
ES  
9

consult

**Accuracy**

standard for  $p_N \geq 0.4$  bar: 0.35 % FSO  
standard for  $p_N < 0.4$  bar: 0.50 % FSO  
option 1 for  $p_N \geq 0.4$  bar: 0.25 % FSO  
option 2: 0.10 % FSO <sup>2</sup>  
customer

3  
5  
2  
1  
9

consult

**Electrical connection**

male and female plug ISO 4400  
male plug Binder series 723 (5-pin)  
cable outlet with PVC cable (IP67) <sup>3</sup>  
cable outlet,  
cable with ventilation tube (IP68) <sup>4</sup>  
male plug M12x1 (4-pin) / metal  
Bayonet MIL-C-26482 (10-6); 2 wire  
Bayonet MIL-C-26482 (10-6); 3 wire  
compact field housing  
stainless steel 1.4301 (304)  
customer

1 0 0  
2 0 0  
T A 0  
T R 0  
M 1 0  
B G 0  
B G 4  
8 5 0  
9 9 9

consult

**Mechanical connection**

G1/2" DIN 3852  
G1/2" EN 837  
G1/4" DIN 3852  
G1/4" EN 837  
G1/2" DIN 3852  
with flush sensor <sup>5</sup>  
G1/2" DIN 3852 open pressure port <sup>5</sup>  
1/2" NPT  
1/4" NPT  
customer

1 0 0  
2 0 0  
3 0 0  
4 0 0  
F 0 0  
H 0 0  
N 0 0  
N 4 0  
9 9 9

consult

**Seal**

FKM

EPDM

without (welded version) <sup>5, 6</sup>

customer

1

3

2

9

consult

**Special version**

standard

customer

0 0 0

9 9 9

consult

<sup>1</sup> absolute pressure possible from 0.4 bar

<sup>2</sup> not in combination with SII

<sup>3</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C), others on request

<sup>4</sup> code TR0 = PVC cable, cable with ventilation tube available in different types and lengths

<sup>5</sup> only for  $p_w \leq 40$  bar

<sup>6</sup> welded version only with pressure ports according to EN 837 and NPT

© 2023 BDSENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.